


橋形クレーン用 ケーブルリール

ENDO

ENDO CABLE REEL "CRA CRE" SERIES 拾い巻き特化型ケーブルリール



水平拾い巻き取りに特化した、橋形クレーン走行用ケーブルリールです。
様々な太さのケーブルを 15m から最大 70m まで巻き取る機種を多数
用意しました。

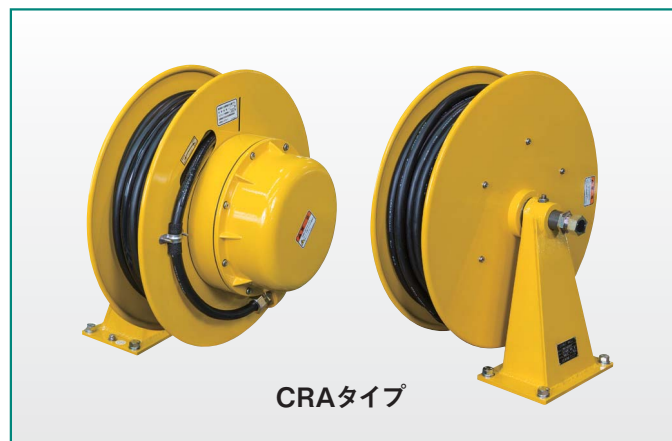

CRA シリーズ スリッピング容量及び極数によるL寸法増加対応表

定格電流 \ 極数	3	4	適用型式
20A	0		CRA-4M524W ～ CRA-6LN9L75F
50A	0		
100A	30mm	50mm	
100A	0	30mm	CRA-8M10L130T,F
150A	0	30mm	

CRE シリーズ スリッピング容量及び極数によるL寸法増加対応表

定格電流	極数	3	4	適用型式
200A		0	0	CRE-8M11260W2K ～ 912260T2K
300A		0	0	

橋形クレーン走行用（CRA・CRE）選定表

●ケーブル：2PNCT ●取り付け高さ：1m以下 ●クレーン走行速度：40m/min 以下

斜線部については弊社へお問い合わせください。

巻取長さ	15m	20m	25m	30m	35m	40m	45m	50m	55m	60m	65m	70m
1 8sq-3c $\phi 17 \times 0.525\text{kg/m}$	CRA-4M524W 50A-3P-8-15	CRA-4M524T 50A-3P-8-20	CRA-4M524T 50A-3P-8-25	CRA-5M736T 50A-3P-8-30	CRA-5M736T 50A-3P-8-35	CRA-5LM736T 50A-3P-8-40	CRA-5LM736F 50A-3P-8-45	CRA-5LM736F 50A-3P-8-50	CRA-5LM736F 50A-3P-8-55			
2 8sq-4c $\phi 18.5 \times 0.655\text{kg/m}$	CRA-4M524W 50A-4P-8-15	CRA-4M524T 50A-4P-8-20	CRA-4M524T 50A-4P-8-25	CRA-5LM736T 50A-4P-8-30	CRA-5LM736T 50A-4P-8-35	CRA-5LM736T 50A-4P-8-40	CRA-5LM736F 50A-4P-8-45	CRA-5LM736F 50A-4P-8-50	CRA-5LM736F 50A-4P-8-55			
3 14sq-3c $\phi 20 \times 0.795\text{kg/m}$	CRA-5M636W 100A-3P-14-15	CRA-5M636W 100A-3P-14-20	CRA-5M636T 100A-3P-14-25	CRA-5LM755T 100A-3P-14-30	CRA-5LM755T 100A-3P-14-35	CRA-6LN8L75F 100A-3P-14-40	CRA-6LN8L75F 100A-3P-14-45	CRA-6LN8L75F 100A-3P-14-50	CRA-6LN8L75F 100A-3P-14-55	CRA-6LN8L75F 100A-3P-14-60		
4 14sq-4c $\phi 22 \times 1.0\text{kg/m}$	CRA-5M655W 100A-4P-14-15	CRA-5M655W 100A-4P-14-20	CRA-5LM755T 100A-4P-14-25	CRA-5LM755T 100A-4P-14-30	CRA-5LM755T 100A-4P-14-35	CRA-6LN8L75F 100A-4P-14-40	CRA-6LN8L75F 100A-4P-14-45	CRA-6LN8L75F 100A-4P-14-50	CRA-6LN8L75F 100A-4P-14-55	CRA-6LN8L75F 100A-4P-14-60		
5 22sq-3c $\phi 27 \times 1.33\text{kg/m}$	CRA-6M775W 100A-3P-22-15	CRA-6M775W 100A-3P-22-20	CRA-6LN8L75T 100A-3P-22-25	CRA-6LN8L75T 100A-3P-22-30	CRA-6LN8L75F 100A-3P-22-35	CRA-6LN8L75F 100A-3P-22-40	CRA-6LN9L75F 100A-3P-22-45	CRA-6LN9L75F 100A-3P-22-50	CRA-8M10L130T 100A-3P-22-55	CRA-8M10L130T 100A-3P-22-60	CRA-8M10L130F 100A-3P-22-65	CRA-8M10L130F 100A-3P-22-70
6 22sq-4c $\phi 29 \times 1.67\text{kg/m}$	CRA-6M775W 100A-4P-22-15	CRA-6M775W 100A-4P-22-20	CRA-6LN8L75T 100A-4P-22-25	CRA-6LN8L75T 100A-4P-22-30	CRA-6LN9L75F 100A-4P-22-35	CRA-6LN9L75F 100A-4P-22-40	CRA-8M10L130T 100A-4P-22-45	CRA-8M10L130T 100A-4P-22-50	CRA-8M10L130T 100A-4P-22-55	CRA-8M10L130F 100A-4P-22-60	CRA-8M10L130F 100A-4P-22-65	CRA-8M10L130F 100A-4P-22-70
7 38sq-3c $\phi 32 \times 2.02\text{kg/m}$						CRA-8M10L130T 150A-3P-38-40	CRA-8M10L130T 150A-3P-38-45	CRA-8M10L130T 150A-3P-38-50	CRA-8M10L130T 150A-3P-38-55	CRA-8M10L130F 150A-3P-38-60	CRA-8M10L130F 150A-3P-38-65	CRA-8M10L130F 150A-3P-38-70
8 38sq-4c $\phi 35 \times 2.55\text{kg/m}$						CRA-8M10L130F 150A-4P-38-40	CRA-8M10L130F 150A-4P-38-45	CRA-8M10L130F 150A-4P-38-50	CRE-8M11260T2K 200A-4P-38-55	CRE-8M11260T2K 200A-4P-38-60	CRE-8M11260T2K 200A-4P-38-65	CRE-8M11260T2K 200A-4P-38-70
9 60sq-3c $\phi 39 \times 3.15\text{kg/m}$						CRE-8M11260W2K 200A-3P-60-40	CRE-8LM12260W2K 200A-3P-60-45	CRE-8LM12260W2K 200A-3P-60-50	CRE-8LM12260T2K 200A-3P-60-55	CRE-8LM12260T2K 200A-3P-60-60	CRE-8LM12260T2K 200A-3P-60-65	
10 60sq-4c $\phi 44 \times 4.02\text{kg/m}$						CRE-8LM12260W2K 200A-4P-60-40	CRE-8LM12260T2K 200A-4P-60-45	CRE-8LM12260T2K 200A-4P-60-50	CRE-8LM12260T2K 200A-4P-60-55	CRE-8LM12260T2K 200A-4P-60-60		
11 80sq-3c $\phi 46 \times 4.32\text{kg/m}$						CRE-8LM12260W2K 300A-3P-80-40	CRE-8LM12260T2K 300A-3P-80-45	CRE-8LM12260T2K 300A-3P-80-50	CRE-8LM12260T2K 300A-3P-80-55	CRE-8LM12260T2K 300A-3P-80-60		
12 80sq-4c $\phi 51 \times 5.5\text{kg/m}$						CRE-912260T2K 300A-4P-80-40	CRE-912260T2K 300A-4P-80-45	CRE-912260T2K 300A-4P-80-50	CRE-912260T2K 300A-4P-80-55			

Technical drawing of a roller assembly, showing side and front views with dimensions.

Side View (Left):

- Overall length: 約 L (Approx. L)
- Distance from roller center to mounting bracket: A
- Distance from mounting bracket to roller end: B
- Roller diameter: ϕd
- Mounting bracket dimensions: F, G, F
- Base dimensions: E, M

Front View (Right):

- Overall diameter: D
- Direction of rotation: 捲取方向 (Winding direction)
- Distance from roller center to mounting bracket: H
- Distance from mounting bracket to roller end: C
- Mounting bracket thickness: T
- Roller diameter: $4-\phi 14, 5$
- Base dimensions: K, N

Technical drawing of a circular saw blade assembly, showing side and front views with dimensions.

Side View (Left):

- Overall length: 約 L (Approx. L)
- Distance from mounting bracket to blade tip: A
- Distance from blade tip to mounting bracket: B
- Mounting bracket width: F
- Bracket offset: E
- Bracket thickness: G
- Bracket width: M
- Blade thickness: ϕd

Front View (Right):

- Overall diameter: D
- Direction of rotation: 巻取方向 (Winding direction) with a curved arrow.
- Blade height: H
- Distance from mounting bracket to blade center: C
- Mounting bracket thickness: T
- Mounting bracket width: K
- Mounting bracket outer diameter: N
- Mounting bracket hole diameter: $4-\phi 14.5$

Technical drawing of a circular saw blade assembly, showing side and front views with dimensions.

Side View (Left):

- Overall length: 約 L
- Segment lengths: A, B
- Shaft diameter: ϕd
- Mounting bracket dimensions: F, G, E, M

Front View (Right):

- Overall diameter: D
- Direction of rotation: 捲取方向 (indicated by a curved arrow)
- Hub diameter: $4-\phi 18.5$
- Hub width: K
- Mounting flange diameter: N
- Hub thickness: T
- Distance from center to mounting flange: C
- Blade thickness: H

[illegible][illegible]

諸元

保護構造	IP44 (CRE=IP45) 相当
塗 装	熱硬化性ポリエステル樹脂系塗装
塗 装 色	マンセル2.5Y 7/10 (黄色)
周囲温度	-10℃～+50℃


型式の説明

CRA-6LN8L75F 100A-3P-22-40


ストローク(m)
22mm²用
極数(集電部)
定格電流(集電部)
スプリング使用数
スプリング呼び
ドラムカバーの大きさ
ドラムの大きさ
シリーズ名

- 巻き取り側(1次側)、固定側(2次側)のキャブタイヤケーブルは含みません。
- キャブタイヤケーブル付きも対応します。

【水平拾い巻取り(振り分け)】

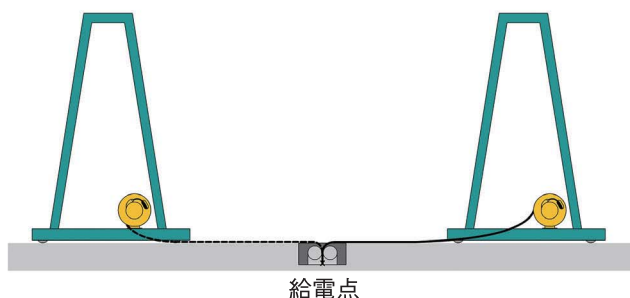

【水平拾い巻取り】

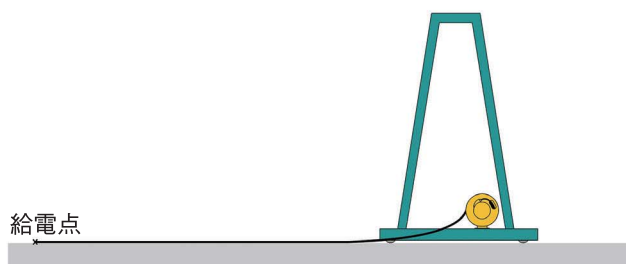

ENDO

ホームページアドレス
<http://www.endo-kogyo.co.jp>

CABLE REEL CRA CRE SERIES

遠藤工業株式会社

本社営業部 新潟県燕市秋葉町3丁目14番7号
〒959-1261 TEL (0256) 62-5133 FAX (0256) 62-5772
東京営業部 東京都千代田区神田東松下町12-2 JBSL神田ビル2F
〒101-0042 TEL (03) 5295-3711 FAX (03) 5295-3717
大阪営業部 大阪市浪速区幸町2丁目3番14号 タイタービル3F
〒556-0021 TEL (06) 6568-1571 FAX (06) 6568-1573
名古屋営業所 愛知県名古屋市中区大須1丁目7番14号 パークIMビル3F
〒460-0011 TEL (052) 253-6231 FAX (052) 253-6240
九州営業所 福岡市博多区博多駅東3丁目11番15号 文喜ビル3F
〒812-0013 TEL (092) 412-5281 FAX (092) 412-5280

